Make your life easier

2 YEARS WARRANTY

Multimedia - Chargers - Multimedia universal chargers

PD 3.1 380W Charging Station with 8 Charging Ports

AN ULTRA-POWERFUL CHARGING STATION TO EQUIP A ROOM OR RECHARGE ALL YOUR DEVICES

With its high power of 380W and its 8 charging ports, the charging station allows you to charge up to 8 devices at the same time.
Its PD 3.1 technology allows it to deliver up to 140W on its USB-C1 and USB-C2 ports. Quick Charge 3.0 allows the two USB-A ports to deliver up to 30W.
Its compact format organized in a square tower with 2 ports on each side allows it to be ideally placed in the center of a meeting table so that everyone can connect to it, from all sides.
Comes with two 2m 140W USB-C/USB-C cables for a ready-to-use product. 1.5m mains connection cable for easy positioning.
Power distribution according to the ports used:
C1 + C2 = 140W + 140W |
C1+C2+C3 = 140W + 140W + 100W |
C1+C2+C3+C4 = 100W + 100W + 65W + 65W |
C1+C2+C3+C4+C5 = 100W + 65W + 65W + 65W + 30W |
C1+C2+C3+C4+C5+C6 = 65W + 65W + 65W + 65W + 30W + 30W |
C1+C2+C3+C4+C5+C6+A1 = 65W + 65W + 65W + 65W + 30W + 30W + 30W |
C1+C2+C3+C4+C5+C6+A1+A2 = 65W + 65W + 65W + 65W + 30W + 30W + 15W + 15W |

BOX CONTENTS

- 1 x PD 3.1 380W charging station with 8 charging ports
- 2 x 2m 140W USB-C / USB-C cable
- 1 x Power connection cable
- 1 x Instructions

Characteristics

15x15x15	8.5x9.5x9.5	USB-C / USB-C	USB-C + USB-A	Black	650

380W max

Ref.: **CHCONF380W**

3303170118900

Packing: 2
Net weight (g): 965
Weight with packaging (g): 1422
Product size (cm):
Packing size (cm): 15.3x16.3x15.3

More info...

www.t-nb.com
La Marque Française

FOLLOW US ON SOCIAL MEDIA @tnb_officiel @t'nb

380W
Charge jusqu'à 8 appareils en simultané

Puce GAN intélligente
Ultra sécurisée

Technologie PD 3.1 jusqu'à 140W
Charge ultra rapide, même pour les appareils exigeants comme les MacBook Pro 16"

Idéal pour les salles de réunion

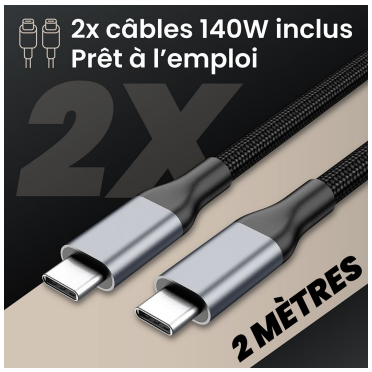
2x câbles 140W inclus
Prêt à l'emploi
2X
2 MÈTRES

the Cube
Design Cube ultra pratique
x6
USB-C
x2
USB-A
QC 3.0 30W

Répartition de la chaleur
et ventilation intégrée

Compatibilité
universelle